Technical Data Sheet



Condensate Neutralizer Tank

The PVI Condensate Neutralizer tank is ideal for neutralizing condensate from condensing water heaters operating on natural gas or propane. The condensate is acidic and has the potential to harm the environment and the sewer system. The PVI Condensate Neutralizer will raise the pH of the condensate to a more neutral level before it is discharged to drain. If the drain is used, in some portion of its run, solely for the purpose of condensate removal and the drain material is subject to damage from acidic condensate then the use of the Condensate Neutralizer is advisable and if applied properly and regularly maintained can avoid damage associated with a leak in your drain piping.

When using the PVI Condensate Neutralizer Tank, with the Centurion water heater, the tank must be installed either in a pit 6" below ground level or the water heater and PVI condensate trap must be elevated above the floor on a 6" housekeeping pad.



Features


- 41 Gal/hr. (155 l/hr.) Capacity
- Prevents acidic condensate from corroding drains and sewer systems
- · Neutralized condensate is more environmentally friendly
- Fast and easy installation
- · Helps maintain a neutral environment for bacteria in septic systems
- · Low profile design for appliances with a near floor condensate drain
- · All corrosion resistant materials
- Suitable for use on all types of Natural Gas and Propane appliances
- Includes initial charge of neutralizing agent
- Includes: baffles designed to channel flow thoroughly for complete neutralization, integral bypass to
 prevent condensate backflow into appliance, NPT connections with unions for fast and versatile installation
- Each tank model will neutralize condensate from appliances up to 6,400,000 BTU/hr. input
- Can be used for multiple appliance installation with a combined BTU/hr. input not exceeding 6,400,000
- Multiple neutralizer tanks should not be installed in series


Technical Information

89030 - Condensate Neutralization Tank

Weight: 45 lbs. 20kg (full)

The condensate neutralization tank shall be PVI Part number 89030. System shall include 18 liter (4.8 U.S. gallon) tank and lid made from polypropylene construction with two 1" FNPT inlet/outlet connections, two 1" NPT PVC unions, and two 1" NPT PVC close nipples. It shall come with 18kg (40lbs) of neutralization media.

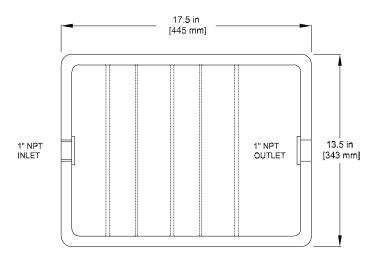



Accessories

89031 - Replacement neutralization media

Weight: 40 lbs. 18.14kg (full)

Project:	Location:
Consultant:	Contractor:
Unit Tag:	Sales Agent:



Hot Water Solutions