


WATER HEATER PIPING GUIDELINE

Two Water Heaters - Single Hot Outlet Temperature

FOR: DURAWATT Electric
 Maxim (gas, low NOx, oil or gas/oil)
 QuickDraw (storage or instantaneous, steam or boiler water)
 TURBOPOWER (83% efficient gas, low NOx, oil or gas/oil)

Duplicate piping for T&P and drains for all heaters.

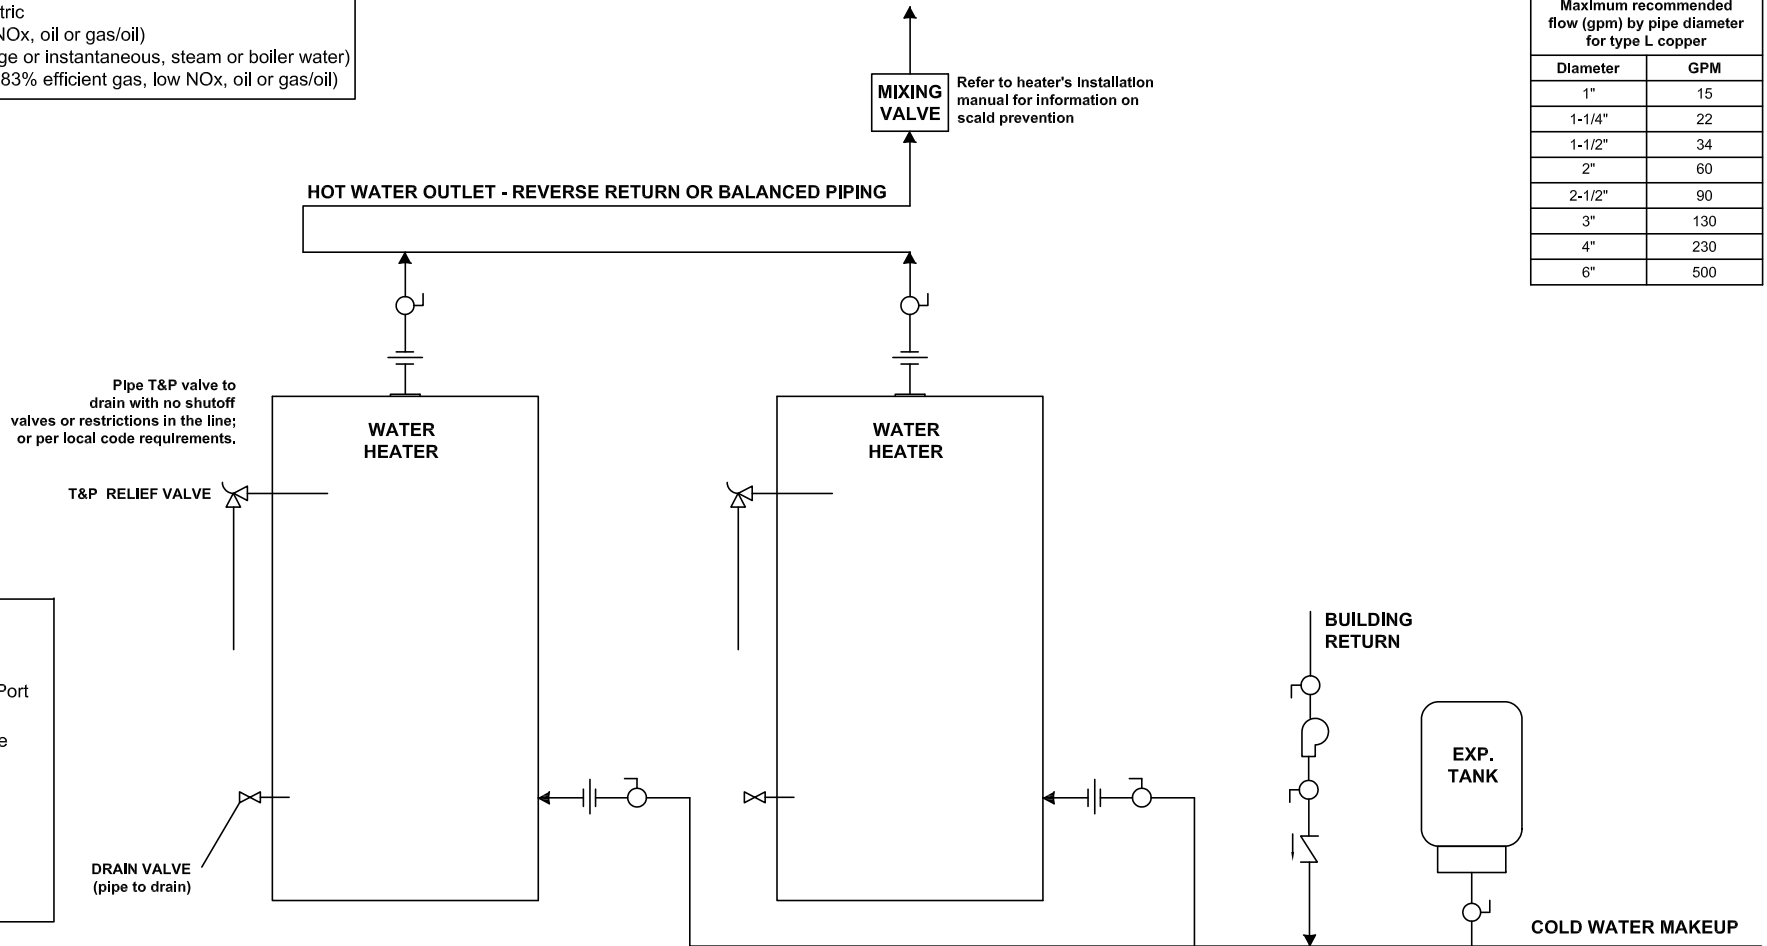

| Maximum recommended flow (gpm) by pipe diameter for type L copper | |
|---|-----|
| Diameter | GPM |
| 1" | 15 |
| 1-1/4" | 22 |
| 1-1/2" | 34 |
| 2" | 60 |
| 2-1/2" | 90 |
| 3" | 130 |
| 4" | 230 |
| 6" | 500 |

LEGEND

- Pipe Union
- Ball Valve, Full Port
- T&P Relief Valve
- Check Valve
- Pump
- Shutoff Valve



PVI Industries, LLC
 Engineered Water Heating Solutions®
 www.pvi.com
 Fort Worth, TX • 800-784-8326