


# EZ Plate<sup>®</sup> Instantaneous Water Heater

## Double-wall, Brazen Plate Heat Exchanger

### Dimensions

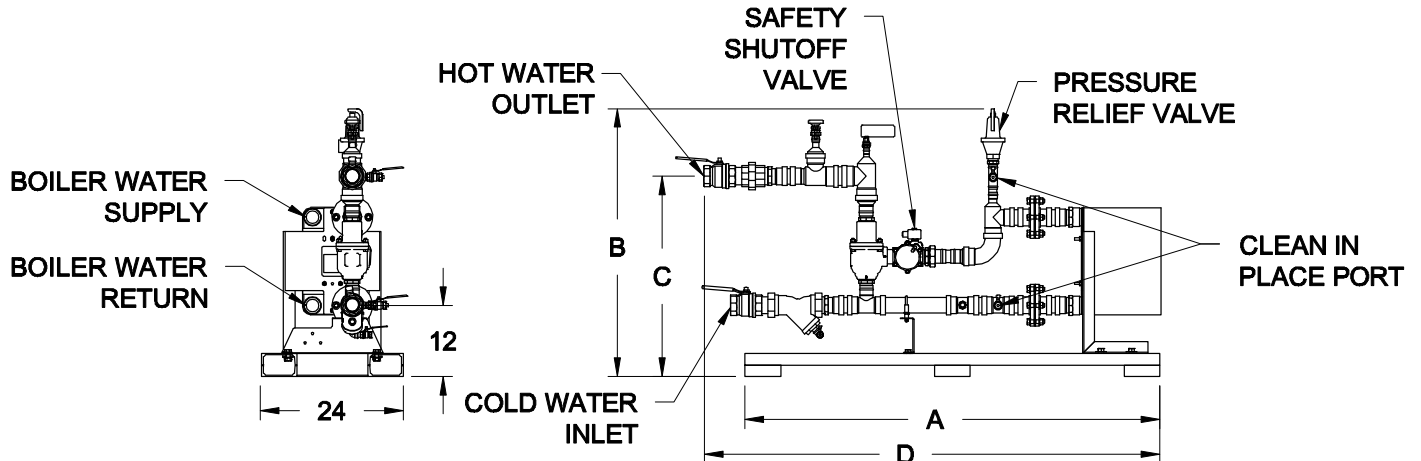

4 gpm minimum recirculation flow through EZ Plate required.  
All dimensions are in inches.

Dimensions									
Model Number	Cold Inlet NPT	Hot Outlet NPT	Boiler Supply NPT	Boiler Return NPT	A	B	C	D	Weight (lbs)
EZ10DW	1	1	2-1/2	2-1/2	42	38-1/2	27-1/2	-	220
EZ15DW	1	1	2-1/2	2-1/2	42	38-1/2	27-1/2	-	230
EZ20DW	1-1/2	1-1/2	2-1/2	2-1/2	60	41	28-1/2	-	320
EZ30DW	1-1/2	1-1/2	2-1/2	2-1/2	60	41	28-1/2	-	330
EZ40DW	2	2	2-1/2	2-1/2	70	45-1/2	37	-	405
EZ50DW	2	2	2-1/2	2-1/2	70	45-1/2	37	-	415
EZ60DW	2	2	2-1/2	2-1/2	70	45-1/2	37	-	425
EZ75DW	2-1/2	2-1/2	2-1/2	2-1/2	70	45-1/2	34	77	480
EZ90DW	2-1/2	2-1/2	2-1/2	2-1/2	70	45-1/2	34	77	500
EZ105DW	2-1/2	2-1/2	2-1/2	2-1/2	70	45-1/2	34	77	530

Electrical requirements: 120V, 60 Hz., 15 amps service to a single-point connection  
\* For product configuration, refer to performance documents PV8466 through PV8475  
For standard and optional equipment list, refer to form PV8487

PVI reserves the right to change the design and specification without notice.

PV 8489 07-2018



PVI Industries, LLC  
Fort Worth, TX • (800) 784-8326 • www.pvi.com

