


QuickDraw® BOILER WATER SINGLE-WALL PACKAGED WATER HEATER with AquaPLEX® STORAGE TANK

TANK SERIES 400 GALLON

MODEL NUMBER	STANDARD RECOVERY RATE	STANDARD BOILER WATER FLOW	A COLD INLET NPT	B HOT OUTLET NPT	C BOILER WATER INLET NPT	D BOILER WATER OUTLET NPT	E COWLING DEPTH	F SKID LENGTH	G OVERALL DEPTH	H PULL SPACE	SHIPPING WEIGHT LBS
	40°F - 140°F	180°F (20°ΔT)									
300 L 400A-QW	140	12	2	2	3/4	3/4	50	46	77	34	1330
600 L 400A-QW	270	23	2	2	1	1	62	54-1/2	89	58	1340
800 L 400A-QW	380	32	2	2	1-1/4	1-1/4	50	46	77	46	1380
1100 L 400A-QW	510	43	2	2	1-1/4	1-1/4	62	54-1/2	89	58	1390
1500 L 400A-QW	690	58	2	2	1-1/2	1-1/2	50	46	78	46	1470
2000 L 400A-QW	950	80	2	2	2	2	62	54-1/2	90	58	1490
2300 L 400A-QW	1020	87	2-1/2	2	2	2	50	46	78	40	1570
2600 L 400A-QW	1200	102	2-1/2	2	2-1/2	2-1/2	50	46	85	46	1580
3000 L 400A-QW	1420	120	2-1/2	2	2-1/2	2-1/2	62	54-1/2	97	52	1660
3500 L 400A-QW	1630	138	2-1/2	2	2-1/2	2-1/2	62	54-1/2	97	58	1680
4000 L 400A-QW	1790	152	2-1/2	2	3	3	50	46	85	46	1760
4300 L 400A-QW	2110	179	2-1/2	2	3	3	62	54-1/2	97	52	1780
4500 L 400A-QW	2390	203	2-1/2	2	3	3	62	54-1/2	97	58	1800
6300 L 400A-QW	2960	251	2-1/2	2	4	4	62	54-1/2	97	52	1900
8200 L 400A-QW	3800	322	2-1/2	2	4	4	62	54-1/2	97	52	2060
	gph	gpm									

* For recoveries, boiler water flows and valve sizes at different boiler water temperatures and temperature rises, refer to forms PV 6909.

Electrical requirements: 120V, 1Ø, 60 Hz., 15 amps maximum, to a single point connection.
When using 4" boiler water valve, the supply and return piping is to be field supplied and installed.
Dimensions are in inches unless otherwise noted.
For standard and optional equipment, see form PV 8163.
If using glycol, consult your representative.

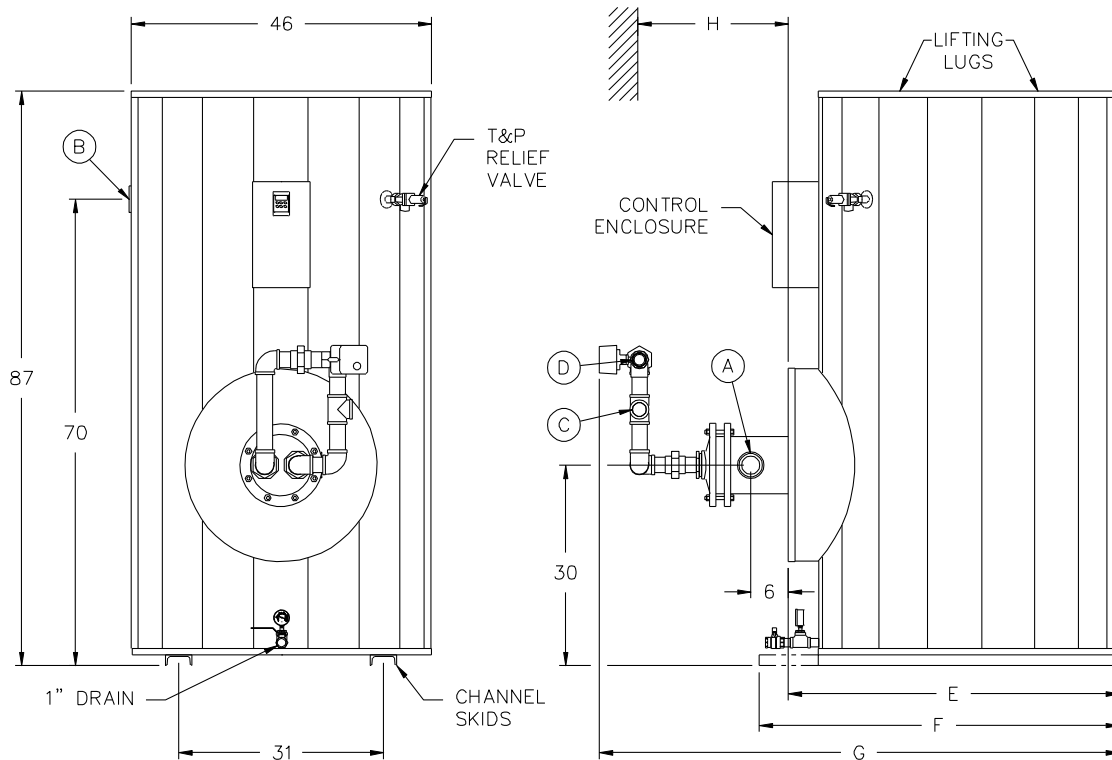

PVI RESERVES THE RIGHT TO CHANGE THE DESIGN AND SPECIFICATION WITHOUT NOTICE.